

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
25 March 2004 (25.03.2004)


PCT

(10) International Publication Number
WO 2004/024463 A1

- (51) International Patent Classification⁷: **B42D 9/00**
- (21) International Application Number:
PCT/AU2003/001014
- (22) International Filing Date: 13 August 2003 (13.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2002951388 16 September 2002 (16.09.2002) AU
- (71) Applicant and
(72) Inventor: IRELAND, Steven, Edward [AU/AU]; 12
Maxwell Street, Blairgowrie, VIC 3942 (AU).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (74) Agent: MURRAY, James; Registered Patent Attorney, 30
Helena Court, Rye, VIC 3941 (AU).
- Declarations under Rule 4.17:**
— *as to the identity of the inventor (Rule 4.17(i)) for all designations*

[Continued on next page]

(54) Title: BOOKMARK

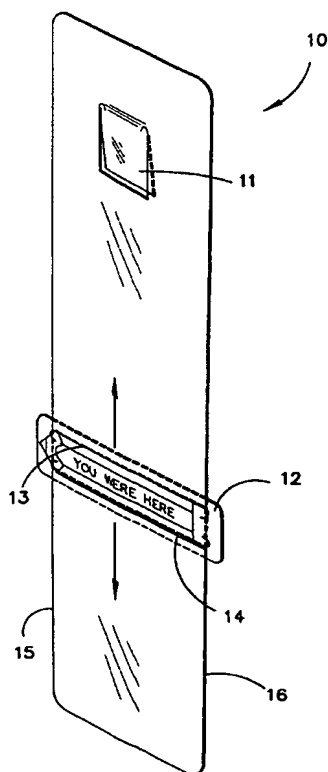

(57) **Abstract:** A bookmark for use in indicating a line, column and page in an open book has a thin, flat, rectangular body (10) over which an encircling indicator (12) or indicators can move. The cuts defining the restraining part of each indicator have inwardly curving portions at their ends providing a degree of friction to temporarily restrain each indicator in position.

WO 2004/024463 A1